


VersiTank™ 550

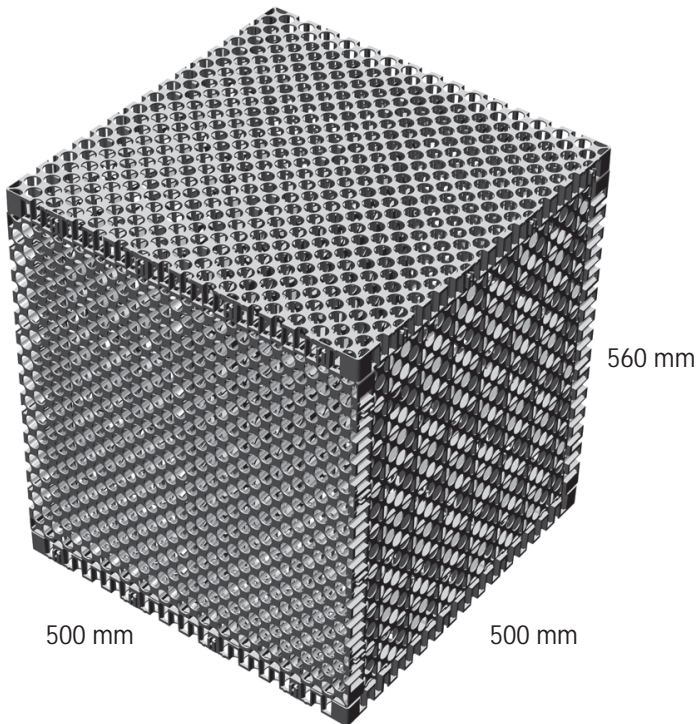

Tank size and weight

Length : 500 mm

Width : 500 mm

Height : 560 mm

Volume : 0.14 m³

Weight : 3 Stabilizers - 6.5 kg

4 Stabilizers - 7.5 kg

Compressive strength


3 Stabilizers - 11.4 t/m²

4 Stabilizers - 14.4 t/m²



Advantages

- High compressive strength allows use under trafficable areas
- Small apertures in both VersiCell® Expandable Water Infiltration/Detention Tank and VC Stabilizers minimises risk of compacted soil and stones rupturing geotextile
- Easy on-site assembly
- May be interlocked to form expandable stable units

Assembly Procedures

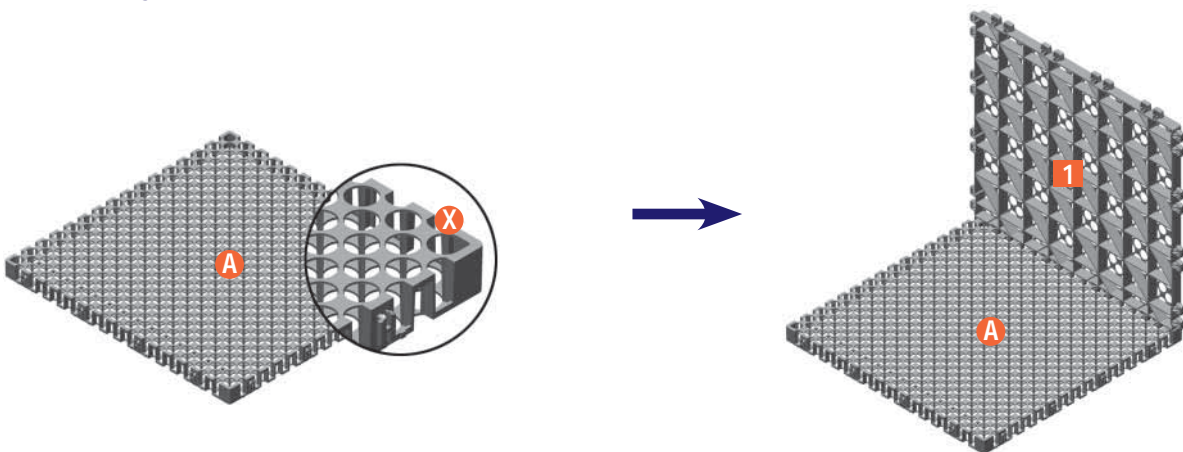

1. Select four VersiCell® panels.
2. Place VersiCell® panel **A** on a flat surface ensuring the sides with the large hole **X** in the corner faces upwards.
3. Place VC Stabilizer **1** onto VersiCell® panel **A**.
4. Push down to interlock the VC Stabilizer with the VersiCell® panel.

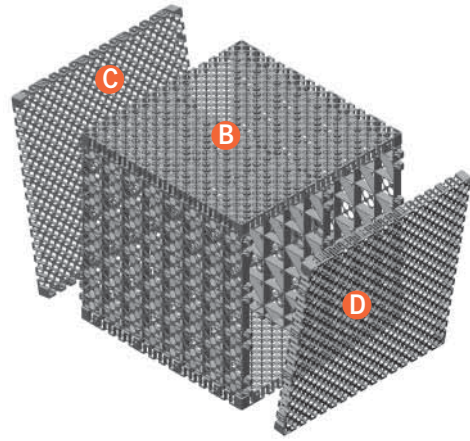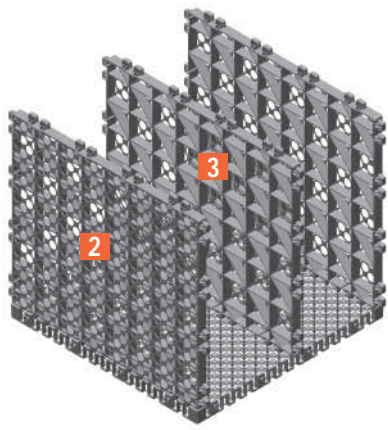


5. Similarly, interlock VC Stabilizers **2** and **3** into VersiCell® panel **A**.
6. If additional strength is required, four VC Stabilizers may be inserted into VersiCell® panel **A**.

7. Place VersiCell® panel **B** on VC Stabilizers **1**, **2**, and **3** ensuring the side with the large holes in each corner is facing inwards.
8. Push down to interlock VersiCell® panel with the VC Stabilizers.
9. Repeat for VersiCell® panels **C** and **D** ensuring the sides with the large holes in the corners are facing inwards.

Expandable VersiTanks™

VersiTank™ are expandable by pre-assembling the appropriate number of VersiCell® bottom panels before interlocking the VC Stabilizers into the bottom panels. Use 2 VC Stabilizers (one on each side) where the VersiCell® panels are joined. (Detail **Y**)

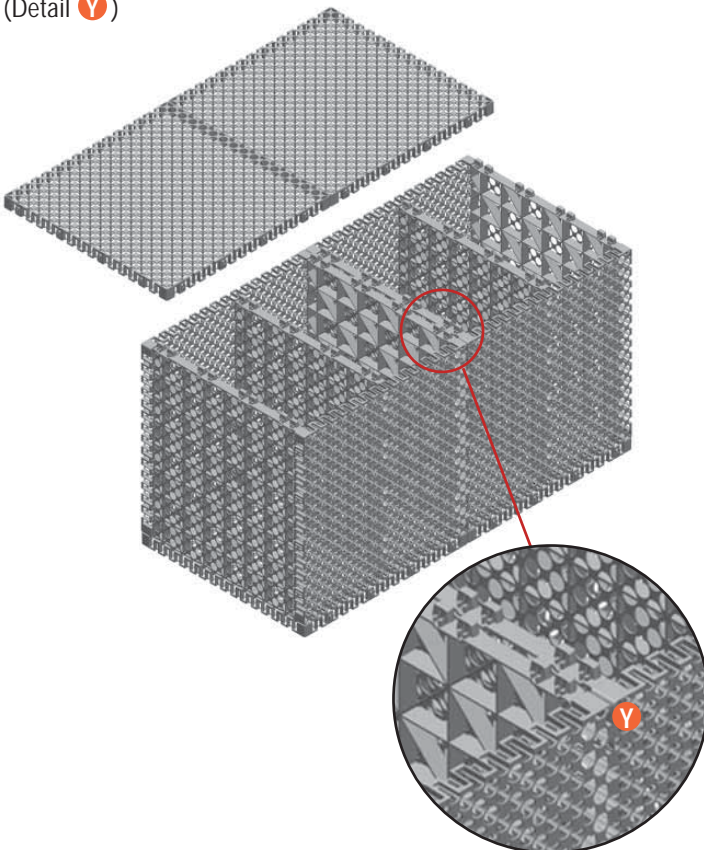

Correct VersiTank™ Placement

Assembled VersiTank™ should be placed with the side where VersiCell® extends to the edges facing horizontally and with the VC Stabilizers facing upwards. (Detail **X**)

