


VersiTank® Plus 840

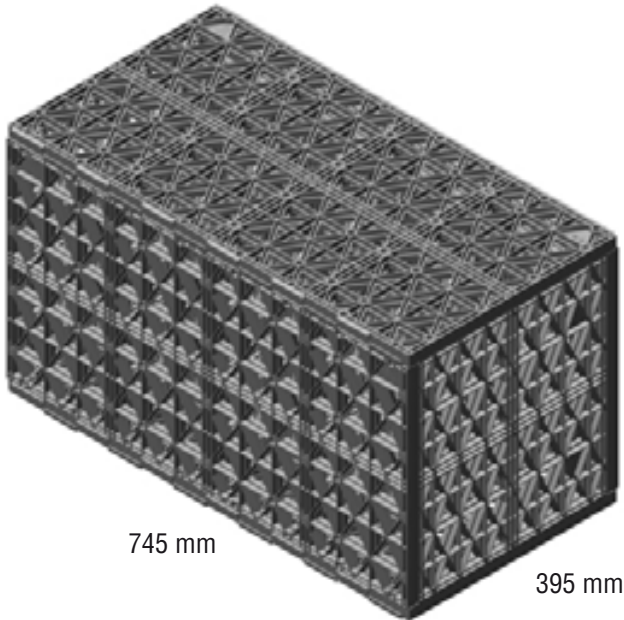

Tank size and weight

Length	: 745 mm (~29 in.)
Width	: 395 mm (~15 in.)
Height	: 425 mm (~16 in.)
Volume	: 0.125 m ³ (~33 U.S gal)
Weight	:
3 stabilizers	: 7.8 kg (17.2 lbs)
4 stabilizers	: 8.5 kg (18.7 lbs)
5 stabilizers	: 9.3 kg (20.5 lbs)

Compressive strength


3 stabilizers	: ≤ 27 t/m ² (≤ 38 psi)
4 stabilizers	: ≤ 34 t/m ² (≤ 48 psi)
5 stabilizers	: ≤ 40 t/m ² (≤ 56 psi)

Advantages


- Suitable for use under extreme weigh bearing areas
- Large tank unit capacity
- Interlock vertically and horizontally for maximum stability
- Easy on-site assembly
- Small wall apertures minimise risk of rupturing geotextile during backfilling

Panel Details


VersiTank® Plus 840 has 2 similar large modules **W** and **B** each with different edge details and a smaller module **S**

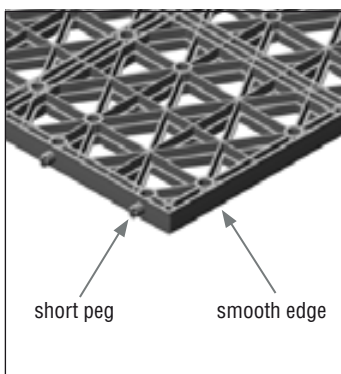

Wall **W** module

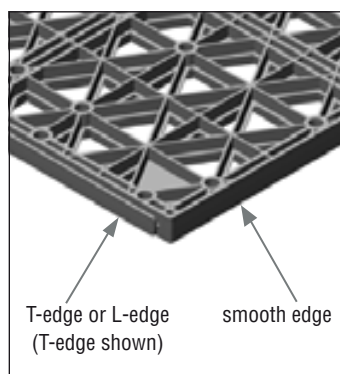


Base/Top **B** module

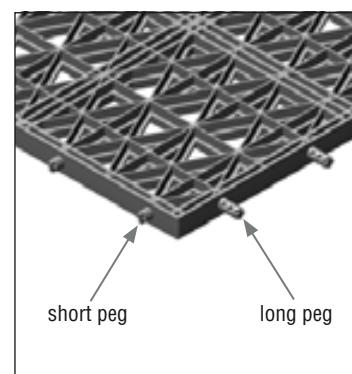


Stabilizer **S** module

Assembly Procedures


VersiTank® Plus 840

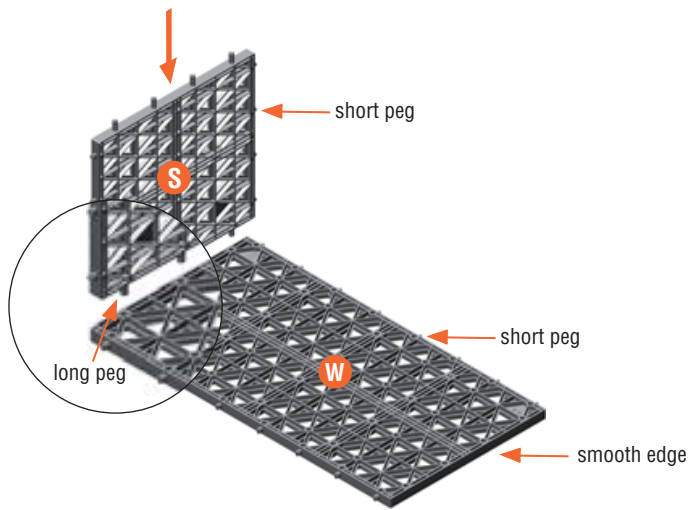


1. Insert Stabilizer **S** module into Wall **W** module

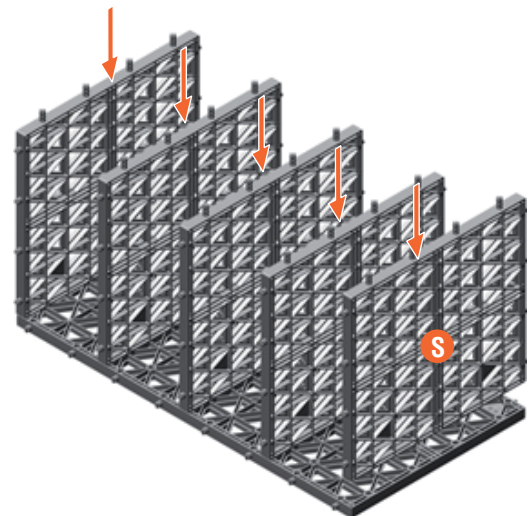


2. Repeat for remaining Stabilizer **S** modules

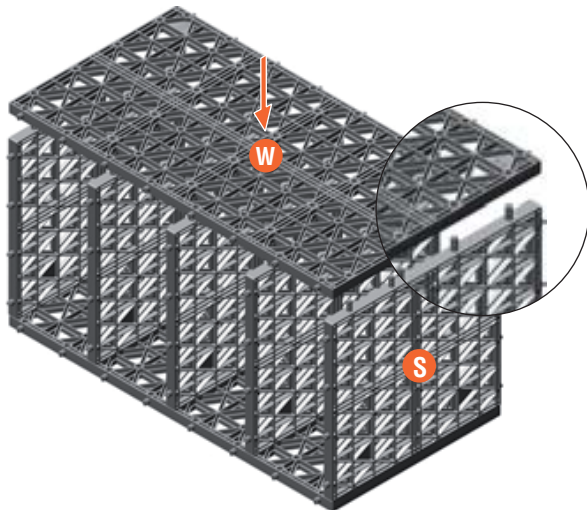

3. Fix remaining Wall **W** module

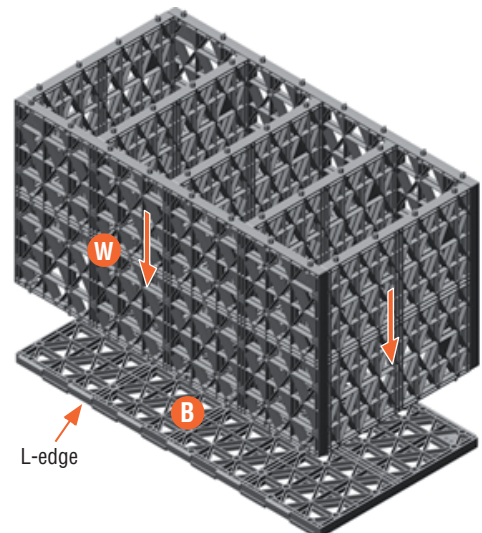


4. Turn partially assembled tank on its side and fix onto Base **B** module

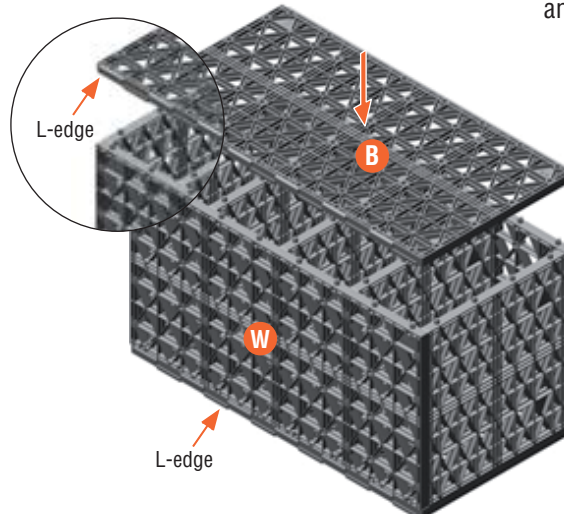


5. Fix Top **B** module with L-edge facing the same direction as in Base **B** module

Note: VersiTank® Plus 840 must be placed with Wall **W** modules positioned vertically.


Multiple VersiTank® Plus 840

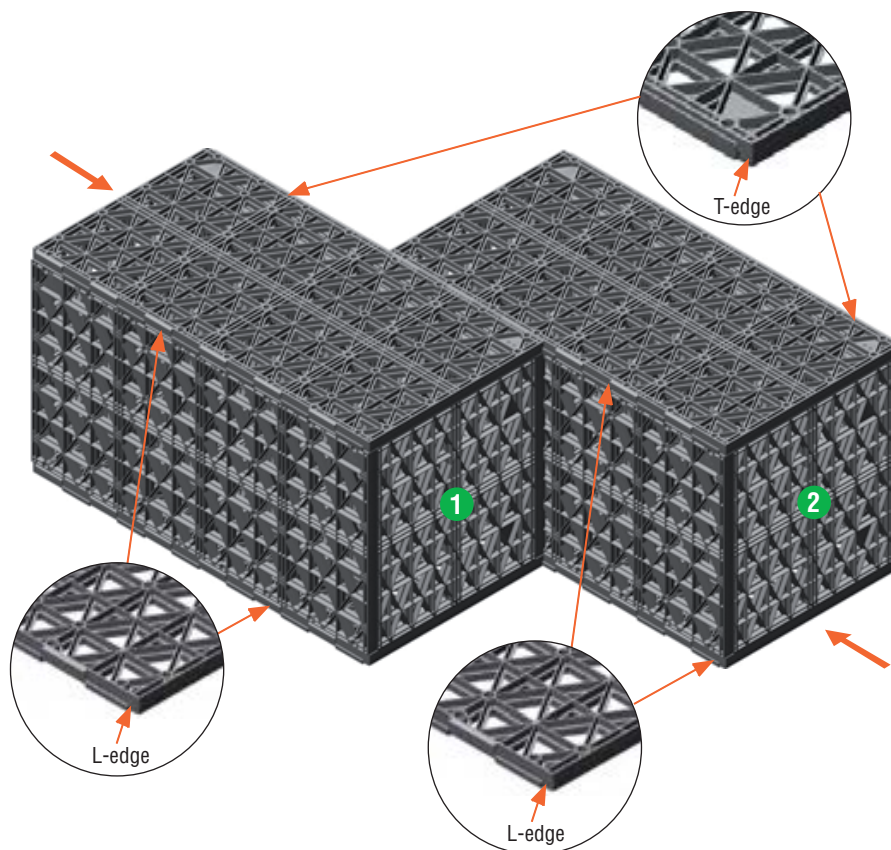

1. Join **VersiTank® Plus 840** ① and ② horizontally by sliding against each other. Repeat for additional tanks where required.

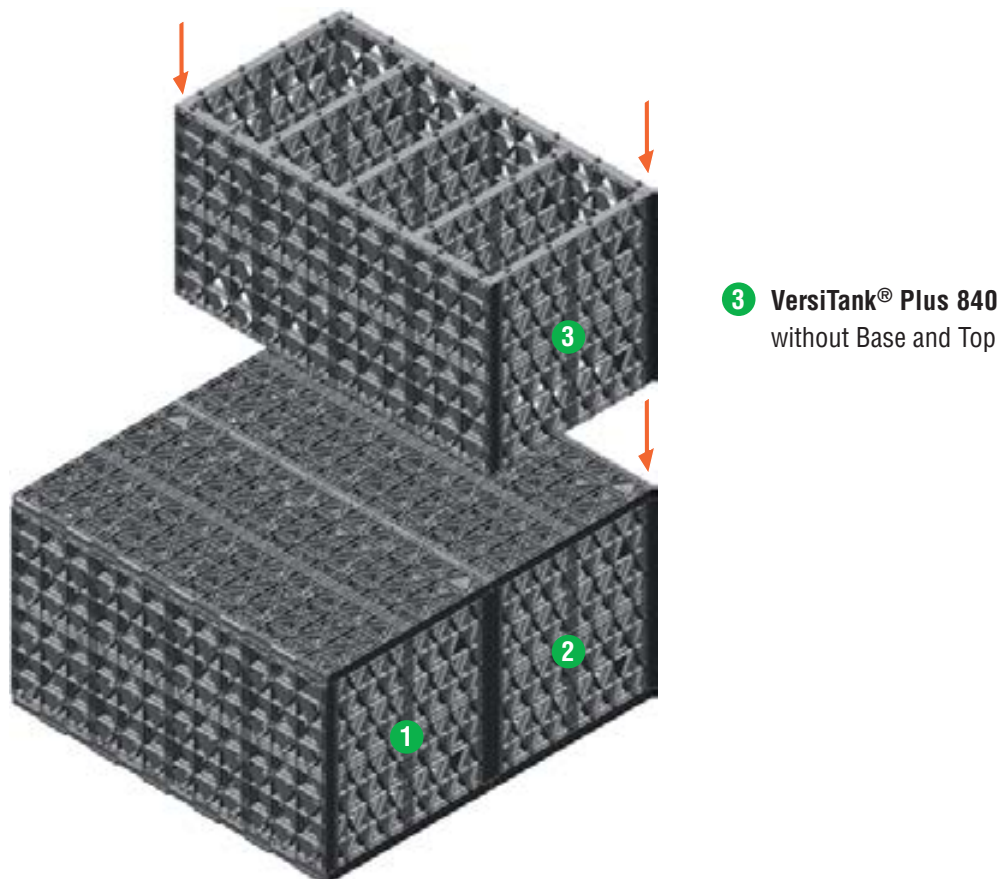

2. To join vertically, fix **VersiTank® Plus 840** ③ without Base and Top modules onto **VersiTank® Plus 840** ②

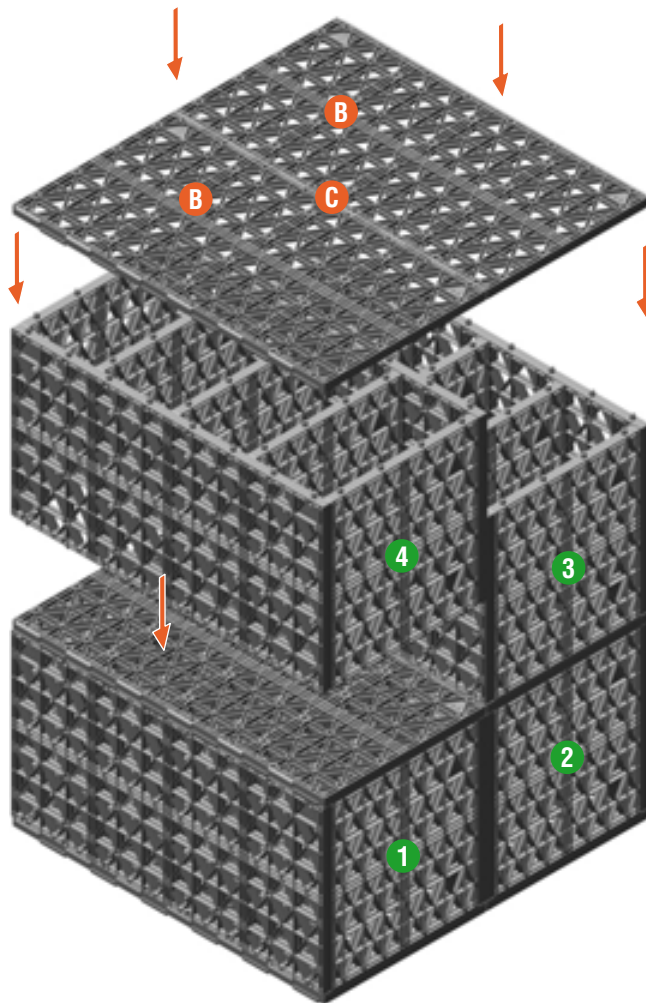

C Top
 Assemble required size of Top by sliding the edges of **B** modules against each other

3 4 VersiTank® Plus 840
 without Base and Top

1 2 VersiTank® Plus 840

3. Fix VersiTank® Plus 840 **4** onto VersiTank® Plus 840 **1**
 Then fix Top **C** onto VersiTank® Plus 840 **3** and **4**

Note: The information provided in this brochure is based on current knowledge and experience and does not infer any legally binding assurance or warranty, expressed or implied. Intending purchasers should verify whether any changes to specifications or applications or otherwise have been made since this literature was issued. The products in this brochure are manufactured using specified recycled plastics under detailed quality control standards and procedures. Factors including source of raw material and manufacturing processes may impact slightly on the strength of the modules.



Singapore: +65 6356 2800
 Australia: +61 2 9648 2073
www.elmich.com

Distributed by: